

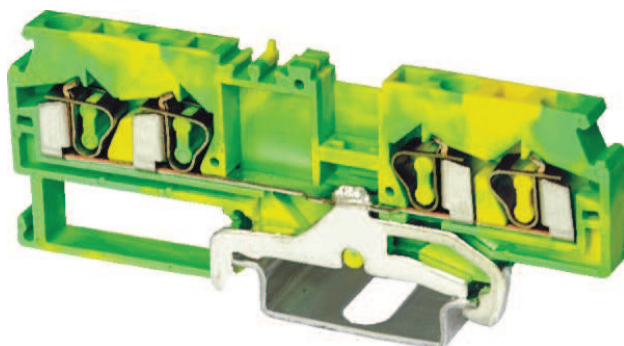
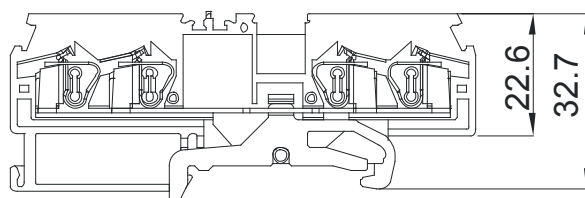


CE

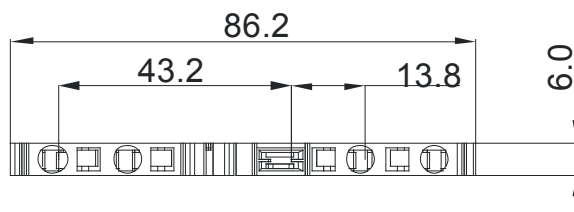

WS 4-QU-PE

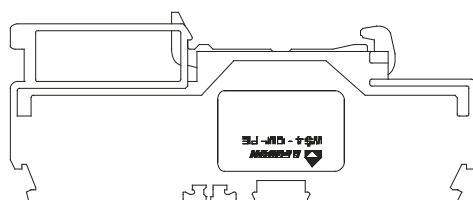

Approval

Electrical

Standard	UL	IEC
Rated voltage	—	—
Rated current	—	—
Wire size	28-12mm ²	0.2-4.0mm ²
T/W/End plate	6/86/2.5mm	36.5/44mm
Height(NS35:7.5/NS35:15)	8KV/3	10mm
Rated surge voltage/contamination class	PA/V-0	
Stripping length		
Insulating material/Inflammability class		

Specification

(1) Terminal block	WS 4-QU-PE	100
(2) Cover	D-WS 4-QU	100
(3) Adjacent jumper	WFA-4	300
(4) Alternate jumper		
(5) Staggered jumper	1-2 1-5 1-3 1-6 1-4 1-8	100 50 100 50 100
(6) Insulation stop	TTA-4	200
(7) Protective warning mark	EEA-4	100
(8) Test plug adapter	SSA	100
(9) Test plug	SSB	50
(9) Zack strip	DEK6	100

Model	Pieces
WS 4-QU-PE	100
D-WS 4-QU	100
WFA-4	300
1-2WFC-4/2 1-5WFC-4/5 1-3WFC-4/3 1-6WFC-4/6 1-4WFC-4/4	100 50 100 50 100
TTA-4	200
EEA-4	100
SSA	100
SSB	50
DEK6	100

HOW TO ORDER :

- **P** - -

X	X	X
Customer Request		

Series No. No. of pole Color

1 Gray	4 Green	7 Transp-arent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 white

mm (INCH)	 DEGSON ELECTRONICS CO., LTD.
THROANGLE PROJECTION	NAME WS 4-QU-PE